


BrightEye 1

Analog/SDI to SDI/Optical Converter with TBC and Frame Sync

BrightEye 1 is a comprehensive solution to signal acquisition. With analog component, analog composite S-Video (Y/C), and SDI video inputs, it can take on any video source. The built-in Time Base Corrector/ Frame Synchronizer provides a rock steady output — even with marginal inputs. The reference input is used to genlock the converter output to house reference such as color black.

Front panel controls select input source and format and adjust video gain. Video levels can be adjusted through BrightEye PC.

Simultaneous SDI (electrical) and Optical outputs are provided, so you can deliver the signal just about anywhere. Both Color Bars and the SDI Checkfield (Pathological) test patterns are included to facilitate transmission path testing.

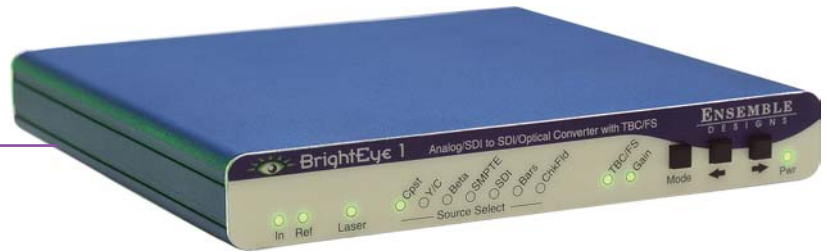

- ▶ Analog and SDI Input
- ▶ SDI and Optical Output
- ▶ TBC and Frame Sync
- ▶ 12 Bit

▶ Specifications

Serial Digital Input

Signal Type	SMPTE 259M
Impedance	75 Ω, BNC
Return Loss	>15 dB
Max Cable Length	300 meters

Analog Input

Type	Beta/SMPTE, Y, Pr, Pb NTSC, PAL Composite NTSC, PAL S-Video
Impedance	75 Ω, BNC
Return Loss	>40 dB
Input DC	+/-1 volt DC
Input Hum	<100 mV

Serial Digital Output

Type	SMPTE 259M
Impedance	75 Ω BNC
Return Loss	>15 dB
Output DC	None (AC coupled)

Optical Output

Type	SMPTE 297M (Optical equivalent of 259M)
Wavelength	1310 nm
Power	-7 dBm
Maximum length	20km
Fiber Type	Multi or Single Mode
Connector	SC

Analog to SDI Performance

Bit Resolution	12 bit input quantization 4 X oversampling
Signal to Noise	>62 dB, weighted
Frequency Response	±0.1 dB, 0 to 5.5 MHz
Composite and Y	±0.1 dB, 0 to 2.75 MHz
Pr, Pb	90 μSec
Minimum Delay	

Reference Input

Type	1 V p-p Composite Video, PAL or NTSC
Impedance	75 Ω, BNC
Return Loss	>40 dB

General Specifications

Size	5.625" W x 0.8" H x 5.5" D (143 mm x 20 mm x 140 mm) including connectors
Power	12 volts, 7 watts (100-230 VAC modular power supply provided)
Temperature Range	0 to 40° C ambient
Relative Humidity	0 to 95° noncondensing