



BrightEye 3

Analog to SDI Converter with TBC and Frame Sync

BrightEye 3 is an agile Time Base Corrector / Frame Synchronizer with composite, component and Y/C inputs and SDI video out. Input signals are digitized to 12 bits of resolution and time base corrected by a noise tolerant tracking circuit. An external reference input allows genlock to a timing reference such as color black.

Input selection, gain control, and TBC enable is provided through the front panel interface. Video levels can be adjusted through BrightEye PC.

Input and Reference presence are indicated through front panel LEDs. BrightEye 3 is great for capturing consumer VCRs into non-linear editing systems.

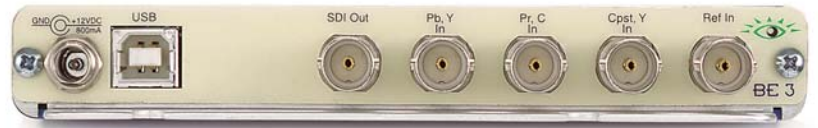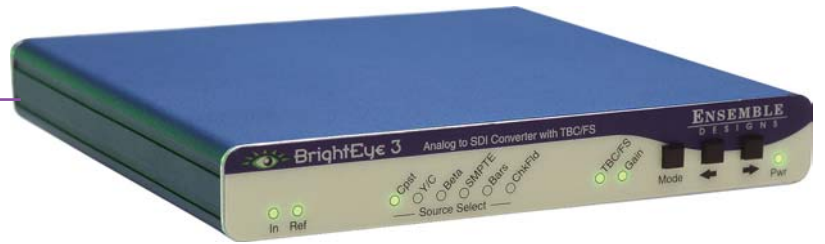

- ▶ Analog Input
- ▶ SDI Output
- ▶ TBC and Frame Sync
- ▶ 12 Bit

► Specifications

Analog Input

Type	Beta/SMPTE, Y, Pr, Pb NTSC, PAL Composite NTSC, PAL S-Video
Impedance	75 Ω, BNC
Return Loss	>40 dB
Input DC	+/-1 volt DC
Input Hum	<100 mV

Serial Digital Output

Type	SMPTE 259M
Impedance	75 Ω BNC
Return Loss	>15 dB
Output DC	None (AC coupled)

Analog to SDI Performance

Bit Resolution	12 bit input quantization 4 X oversampling
Signal to Noise	>62 dB, weighted
Frequency Response	
Composite and Y	±0.1 dB, 0 to 5.5 MHz
Pr, Pb	±0.1 dB, 0 to 2.75 MHz
Minimum Delay	90 μSec

Reference Input

Type	1 V p-p Composite Video, PAL or NTSC
Impedance	75 Ω, BNC
Return Loss	>40 dB

General Specifications

Size	5.625" W x 0.8" H x 5.5" D (143 mm x 20 mm x 140 mm) including connectors
Power	12 volts, 7 watts (100-230 VAC modular power supply provided)
Temperature Range	0 to 40° C ambient
Relative Humidity	0 to 95° noncondensing